


# N425 Cable management brush



Possible to cut HSS, HS, A1 by scissors

- Can use for blindfolding OA equipment wirings and others
- RoHS compatible product
- REACH compatible product
- Can be compatible to process brush length/m by option

## Bar-cut flex system HSS type

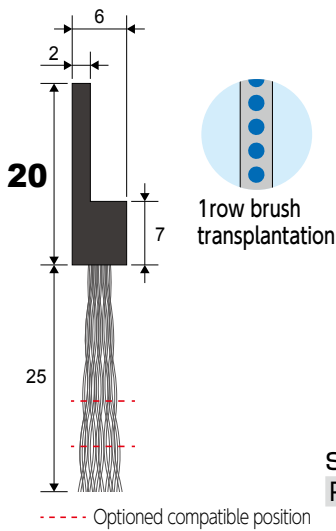

- Possible to cut by scissors
- Install by screw, tape
- Heatproof temperature: less than 80°C

✂ Option (brush transplantation/m)

Finishing brush length

15mm

20mm


Delivery schedule: Ship in 5 ~ 8 business days after order

Processing for 1 brush bar is only 1 kind  
Processing is done by units of 1m

### Specification dimension

Product number	Brush length	Wire diameter	Flame material	Brush material	Length	Weight	Quantity	Unit: mm
N425-HSS-1000	25	0.2	TPE	PP Black wave	1,000	100g	100	
N425-HSS-5000	25	0.2	TPE	PP Black wave	5,000	500g		

## Bar-cut flex system HS type

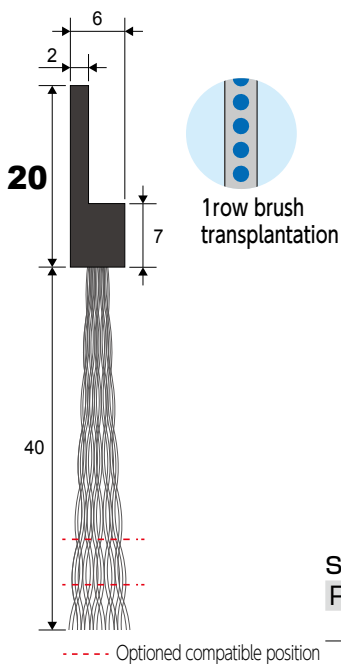

- Possible to cut by scissors
- Install by screw, tape
- Heatproof temperature: less than 80°C

✂ Option (brush transplantation/m)

Finishing brush length

30mm

35mm


Delivery schedule: Ship in 5 ~ 8 business days after order

Processing for 1 brush bar is only 1 kind  
Processing is done by units of 1m

### Specification dimension

Product number	Brush length	Wire diameter	Flame material	Brush material	Length	Weight	Quantity	Unit: mm
N425-HS-1000	40	0.2	TPE	PP Black wave	1,000	120g	100	
N425-HS-5000	40	0.2	TPE	PP Black wave	5,000	600g		

## Bar-cut flex system A1 type

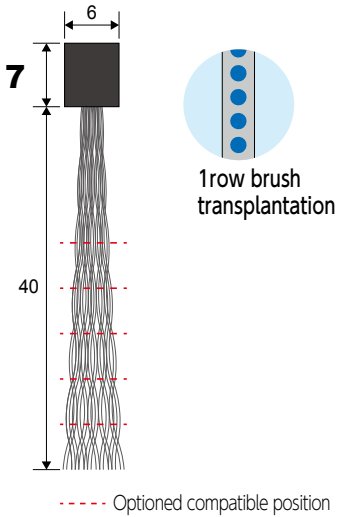

- Possible to cut by scissors
- PP compatible adhesive and others
- Heatproof temperature: less than 80°C

### ✂ Option (brush transplantation/m)

#### Finishing brush length

15mm

20mm

25mm

30mm

35mm


Delivery schedule: Ship in 5 ~ 8 business days after order

Processing for 1 brush bar is only 1 kind  
Processing is done by units of 1m

### Specification dimension

Product number	Brush length	Wire diameter	Flame material	Brush material	Length	Weight	Unit: mm
							Quantity
N425-A1-1000	40	0.2	PP	PP Black wave	1,000	120g	100
N425-A1-5000					5,000	600g	

## Bar-cut flex system H825 type

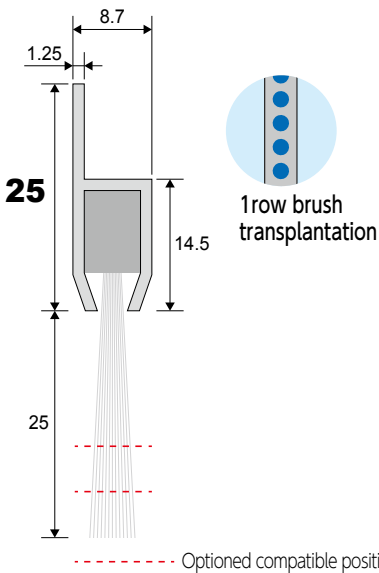

- Possible to adjust dimension toward long-side by hacksaw because of aluminum flame
- Install by screw, tape
- Heatproof temperature: less than 130°C

### ✂ Option (brush transplantation/m)

#### Finishing brush length

15mm

20mm

Delivery schedule: Ship in 5 ~ 8 business days after order

Processing for 1 brush bar is only 1 kind  
Processing is done by units of 1m

### Specification dimension

Product number	Brush length	Wire diameter	Flame material	Brush material	Length	Weight	Unit: mm
							Quantity
N425-H825-500	25	0.2	Aluminum	PBT White	500	140g	100
N425-H825-1000					1,000	280g	

