

A510 重量用ロック式レール

**驚きの耐荷重オールロック式
重量用専用レール**




使用例

カウンター & 脚付きタイプ

正面



ロック状態

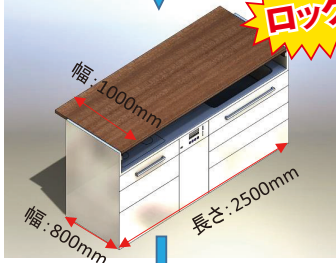


ロック!!

ロック解除⇒後部にスライド



脚降ろし

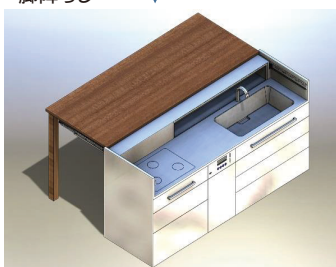

背面



ロック状態



ロック解除⇒後部にスライド




脚降ろし




ロック状態の方法

リリースレバーロック状態

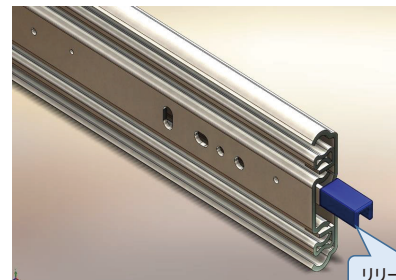

リリースレバーロック解除

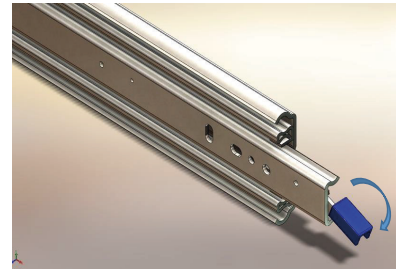

※海外取り寄せ品

※ロック無しスライドレールも有り

A510-1050



耐荷重：組／68kg



仕様寸法

単位：mm

品番	規格	L	A	B	C	D	a	b	c
A510-1050-350	14	350	224	-	-	-	256	-	-
A510-1050-400	16	400	256	-	-	-	256	-	-
A510-1050-450	18	450	64	256	352	-	96	320	-
A510-1050-500	20	500	64	256	384	-	96	384	-
A510-1050-550	22	550	128	320	416	-	128	384	-
A510-1050-600	24	600	128	352	480	-	160	416	-
A510-1050-650	26	650	160	352	512	-	192	384	512
A510-1050-700	28	700	160	384	544	-	192	416	576
A510-1050-750	30	750	160	448	608	-	192	448	608
A510-1050-800	32	800	128	384	544	672	192	480	672

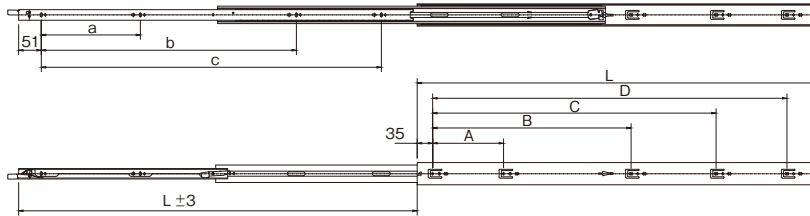

A510-1053



耐荷重：組／100kg



仕様寸法


単位：mm

品番	規格	L	A	B	C	D	A2	B2	C2
A510-1053-350	14	350	224	-	-	-	256	-	-
A510-1053-400	16	400	288	-	-	-	288	-	-
A510-1053-450	18	450	192	320	-	-	96	320	-
A510-1053-500	20	500	224	384	-	-	128	384	-
A510-1053-550	22	550	256	416	-	-	160	416	-
A510-1053-600	24	600	288	480	-	-	160	480	-
A510-1053-650	26	650	288	512	-	-	192	384	512
A510-1053-700	28	700	320	576	-	-	224	416	576
A510-1053-750	30	750	192	384	608	-	224	448	608
A510-1053-800	32	800	192	384	544	672	224	480	672
A510-1053-850	34	850	192	416	576	736	224	512	736
A510-1053-900	36	900	192	448	608	768	224	512	768
A510-1053-950	38	950	192	480	640	832	224	576	832
A510-1053-1000	40	1000	192	480	672	864	224	640	864

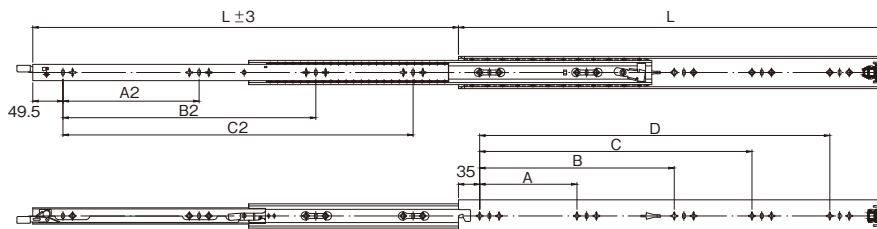

A510-1076

耐荷重：組／225kg



仕様寸法

単位：mm

品番	規格	L	A	B	C	D	E	A2	B2	C2
A510-1076-350	14	350	50	224	-	-	-	160	-	-
A510-1076-400	16	400	50	224	-	-	-	224	-	-
A510-1076-450	18	450	50	192	128	-	-	256	-	-
A510-1076-500	20	500	50	224	160	-	-	288	-	-
A510-1076-550	22	550	50	256	160	-	-	352	-	-
A510-1076-600	24	600	50	256	192	-	-	288	128	-
A510-1076-650	26	650	50	128	192	192	-	320	160	-
A510-1076-700	28	700	50	160	192	192	-	128	224	160
A510-1076-750	30	750	50	160	224	224	-	160	256	160
A510-1076-800	32	800	50	192	224	224	-	160	256	192
A510-1076-850	34	850	50	192	256	224	-	160	320	192
A510-1076-900	36	900	50	192	288	224	-	160	352	192
A510-1076-950	38	950	50	192	288	256	-	160	352	256
A510-1076-1000	40	1000	50	192	256	224	160	192	352	256

※引き抜きは出来ません。

